ADDENDUM No. 2

January 31, 2025. The following changes and additional information shall be incorporated into the Contract Documents and Specifications for the **Detention Pond 6 and East Airport Drainage** project. These modifications shall supersede any existing specifications as detailed herein.

Changes:

Change #1: Article 8 – Bid Security

Replace page 6 of 13 of the *Instructions to Bidders for Construction Contract* with the revised version attached hereto. Specifically, the revised page includes an updated *Article 8 – Bid Security* section, which was previously crossed out but is now fully included.

<u>Change #2:</u> Statement of Qualifications

Page 2 of the *Qualification Statement – Schedule C – Key Individuals* may now be submitted after the contract has been awarded rather than at the time of bid submission. It is expected that bidders will complete Page 1 prior to bid closing.

Change #3: Bid Item 11 - Earthwork

The earthwork quantity has been updated to reflect the 43,509 CY of export per plan. The updated bid schedule is attached.

Change #4: Bid Item 17 – 48-inch RCP Storm Drain

The length of 48-inch RCP storm drain has been changed from 195 feet to 35 feet to eliminate pipe length crossing 2nd Avenue NW that is included in the DOT intersection project.

Additions:

Addition #1: Detention Pond 6B - Bid Alternative #1

Bid Alternative #1 has been added to the bid schedule and includes earthwork construction for the removal of material from the bottom of the existing detention pond. This alternate will be awarded at the City's discretion. The alternate bid schedule for 6B includes Bid Items 36 to 39. Item descriptions for the items correspond with Bid Items 11 to 14 from the base schedule.

Addition #2: Prebid Conference – Meeting Minutes

A pre-bid conference was held on January 30, 2025. The meeting minutes for the items discussed are attached.

<u>Addition #3</u>: Earthwork Export Balancing Pads

Export material is expected to be placed and compacted at the designated balancing pads shown in the attached Sheets C200, C201, and C202. The City may elect for the contractor to use all, or a combination of the pad locations shown. This work will be incidental to Bid Item 11. Placement and compaction shall be performed in accordance with project documents and the geotechnical report. Material compaction and testing shall meet the general structural fill requirements defined in Table 2 of the Williston Square WO #1 Geotechnical Report.

Addition #4: Exhibit #2 -Haul Route

The Contractor shall add Exhibit #2 – Haul Route to the contract documents. This exhibit outlines the designated routes for hauling materials to and from the project site. The contractor shall adhere to the specified haul routes provided in the exhibit.

Clarifications:

Clarification #1: City of Williston 2025 Construction Projects

As there are several projects occurring simultaneously within the Williston Square development, coordination with other projects will be critical. As all bidders may not have pulled each of the plans being bid along with this, the cover sheets of the other projects have been attached to clarify those locations. These sheets do not show the Highway 2 Intersection project, which is closely affecting this project and will require specific coordination throughout construction. The Contractor shall review and consider these projects for potential impacts on scheduling, logistics, traffic coordination, and any other relevant factors affecting the performance of work under this contract.

All bidders shall acknowledge receipt and acceptance of this Addendum by submitting this signed Addendum with the bid package. Bid forms received without this Addendum will be considered informal.

ALLIANCE C	CONSULTING	CONTRACTOR
Signature:	Joeds William	Signature:
Title:	Project Engineer	Title:
Date:	January 31, 2025	Date:

ARTICLE 7—INTERPRETATIONS AND ADDENDA

- 7.01 Owner on its own initiative may issue Addenda to clarify, correct, supplement, or change the Bidding Documents.
- 7.02 Bidder shall submit all questions about the meaning or intent of the Bidding Documents to Engineer in writing. Contact information and submittal procedures for such questions are as follows:
 - A. Via email to James Hammon @ jsh@allianceconsulting.us
- 7.03 Interpretations or clarifications considered necessary by Engineer in response to such questions will be issued by Addenda delivered to all registered plan holders. Questions received less than seven days prior to the date for opening of Bids may not be answered.
- 7.04 Only responses set forth in an Addendum will be binding. Oral and other interpretations or clarifications will be without legal effect. Responses to questions are not part of the Contract Documents unless set forth in an Addendum that expressly modifies or supplements the Contract Documents.

ARTICLE 8—BID SECURITY

- 8.01 A Bid must be accompanied by Bid security made payable to Owner in an amount of **5** percent of Bidder's maximum Bid price (determined by adding the base bid and all alternates) and in the form of a Bid bond issued by a surety meeting the requirements of Paragraph 6.01 of the General Conditions. Such Bid bond will be issued in the form included in the Bidding Documents.
- 8.02 The Bid security of the apparent Successful Bidder will be retained until Owner awards the contract to such Bidder, and such Bidder has executed the Contract, furnished the required Contract security, and met the other conditions of the Notice of Award, whereupon the Bid security will be released. If the Successful Bidder fails to execute and deliver the Contract and furnish the required Contract security within 15 days after the Notice of Award, Owner may consider Bidder to be in default, annul the Notice of Award, and the Bid security of that Bidder will be forfeited, in whole in the case of a penal sum bid bond, and to the extent of Owner's damages in the case of a damages-form bond. Such forfeiture will be Owner's exclusive remedy if Bidder defaults.
- 8.03 The Bid security of other Bidders that Owner believes to have a reasonable chance of receiving the award may be retained by Owner until the earlier of 7 days after the Effective Date of the Contract or 61 days after the Bid opening, whereupon Bid security furnished by such Bidders will be released.
- 8.04 Bid security of other Bidders that Owner believes do not have a reasonable chance of receiving the award will be released within 7 days after the Bid opening.

ARTICLE 9—CONTRACT TIMES

9.01 The number of days within which, or the dates by which, the Work is to be (**120 Calendar Day** construction schedule from the construction initiation date.) The project me be substantially

BID SCHEDULE

Detention Pond 6 & East Airport Drainage Channel

PROJECT: Detention Pond 6 & East Airport Drainage Channel

PREPARED BY: Alliance Consulting

PROJECT NO: 5150-19

LOCATION: Williston City, North Dakota

DATE: 1/16/25

Detention Pond 6A & East Airport Drainage Channel

DESCRIPTION	DESCRIPTION QTY UNIT UNIT		UNIT PRICE	EXTENDED PRICE	
ıl Items			1		
General Conditions/Mobilization	General Conditions/Mobilization 1 LS				
Traffic Control	Traffic Control 1 LS				
Dust/ Mud Control	1	LS			
Pre-existing Conditions	1	LS			
Material Testing	1	LS			
Utility Protection, Relocation, and Coordination	1	LS			
Groundwater Mitigation & Trench/Soil Stabilization	1	LS			
Silt Fence	885	LF			
Berm Bag Locations	1	Each			
Tire Tracking Pads (2 Locations)	1	LS			
ork					
Roadway Earthwork/ Rework Material	43,509	CY			
Topsoil Removal and Stockpile	288,750	SF			
Topsoil Placement	288,750	SF			
Re-Seeding disturbed Areas	Re-Seeding disturbed Areas 288,750 SF				
Water					
96" Storm Drain Manhole (Flat Lid)	1	Each			
72" Storm Drain Manhole	1	Each			
48" RCP Storm Drain Pipe	35	LF			
42" RCP Storm Drain Pipe (Remove Replace and Extend)	86	LF			
57"x38" CMP Arch Storm Drain Pipe	18	LF			
30" RCP Storm Drain Pipe	100	LF			
	2	Each			
42" Concrete End Section (Remove and Relocate)	1	Each			
57"x38" Arched Metal end Section	1	Each			
	2	Each			
	General Conditions/Mobilization Traffic Control Dust/ Mud Control Pre-existing Conditions Material Testing Utility Protection, Relocation, and Coordination Groundwater Mitigation & Trench/Soil Stabilization Silt Fence Berm Bag Locations Tire Tracking Pads (2 Locations) Tork Roadway Earthwork/ Rework Material Topsoil Removal and Stockpile Topsoil Placement Re-Seeding disturbed Areas Water 96" Storm Drain Manhole (Flat Lid) 72" Storm Drain Manhole 48" RCP Storm Drain Pipe 42" RCP Storm Drain Pipe 30" RCP Storm Drain Pipe 24" RCP Storm Drain Pipe 48" Concrete End Section 42" Concrete End Section (Remove and Relocate)	General Conditions/Mobilization 1 Traffic Control 1 Dust/ Mud Control 1 Pre-existing Conditions 1 Material Testing 1 Utility Protection, Relocation, and Coordination 1 Groundwater Mitigation & Trench/Soil Stabilization 1 Silt Fence 885 Berm Bag Locations 1 Tire Tracking Pads (2 Locations) 1 Tire Tracking Pads (2 Locations) 1 Topsoil Removal and Stockpile 288,750 Topsoil Placement 288,750 Topsoil Placement 288,750 Water 96" Storm Drain Manhole (Flat Lid) 1 72" Storm Drain Manhole 1 48" RCP Storm Drain Pipe 35 42" RCP Storm Drain Pipe (Remove Replace and Extend) 86 57"x38" CMP Arch Storm Drain Pipe 100 24" RCP Storm Drain Pipe 100 24" RCP Storm Drain Pipe 100 48" Concrete End Section 2 42" Concrete End Section (Remove and Relocate) 1 57"x38" Arched Metal end Section 2 42" Concrete End Section (Remove and Relocate) 1 57"x38" Arched Metal end Section 2	General Conditions/Mobilization 1 LS General Conditions/Mobilization 1 LS Dust/ Mud Control 1 LS Pre-existing Conditions 1 LS Material Testing 1 LS Utility Protection, Relocation, and Coordination 1 LS Groundwater Mitigation & Trench/Soil Stabilization 1 LS Silt Fence 885 LF Berm Bag Locations 1 Each Tire Tracking Pads (2 Locations) 1 LS Fork Roadway Earthwork/ Rework Material 43,509 CY Topsoil Removal and Stockpile 288,750 SF Topsoil Placement 288,750 SF Re-Seeding disturbed Areas 288,750 SF Water 96" Storm Drain Manhole (Flat Lid) 1 Each 72" Storm Drain Manhole (Flat Lid) 1 Each 48" RCP Storm Drain Pipe 35 LF 42" RCP Storm Drain Pipe 86 LF 57"x38" CMP Arch Storm Drain Pipe 1 LF 30" RCP Storm Drain Pipe 1 100 LF 48" COncrete End Section 2 Each 42" Concrete End Section 1 Each 57"x38" Arched Metal end Section 1 Each 30" Concrete End Section 1 Each	Items	

BID SCHEDULE

	DESCRIPTION	QTY UNIT UNIT PRICE			
27	Tie to Existing Storm Drain Inlet Box	1	LS		
28	8" Thick Concrete Flatwork with 6" Class 5 Aggregate	3,660	SF		
29	Rip-Rap 14" D50 with Filter Fabric Grouted Rip-Rap	3,020	SF		
				Total	
East Airpo	rt Drainage Channel				
30	Groundwater Mitigation & Trench/Soil Stabilization	1	LS		
31	Topsoil Removal and Stockpile	27,535	SF		
32	Topsoil Placement	13,045	SF		
33	Re-Seeding disturbed Areas	13,045	SF		
34	5" Thick Reinforced Concrete (Ditch)	14,500	SF		
35	6" Thick Washed Rock	14,500	SF		
				Total	
	reserves the right to increase or decrease the quantities listed in the Bid to entirely eliminate certain Bid Items if found desirable or expedient.		Bio	d Schedule Grand Total	
Schedule or	to entirely eliminate certain Bid Items if found desirable or expedient.		Bio	d Schedule Grand Total	
Schedule or Alt. #1	to entirely eliminate certain Bid Items if found desirable or expedient.		Bio	d Schedule Grand Total	
Schedule or Alt. #1	to entirely eliminate certain Bid Items if found desirable or expedient.	1,816	Bio CY	d Schedule Grand Total	
Schedule or Alt. #1 I Detention	to entirely eliminate certain Bid Items if found desirable or expedient. Bid on Pond 6B	1,816 15,726		d Schedule Grand Total	
Alt. #1 I Detention	Bid on Pond 6B Roadway Earthwork/ Rework Material		СУ	d Schedule Grand Total	
Alt. #1 I Detention	Bid On Pond 6B Roadway Earthwork/ Rework Material Topsoil Removal and Stockpile	15,726	CY SF	d Schedule Grand Total	
Alt. #1 I Detention 36 37 38	Bid On Pond 6B Roadway Earthwork/ Rework Material Topsoil Removal and Stockpile Topsoil Placement	15,726 15,726	CY SF SF	d Schedule Grand Total	
Alt. #1 I Detention 36 37 38	Bid On Pond 6B Roadway Earthwork/ Rework Material Topsoil Removal and Stockpile Topsoil Placement	15,726 15,726	CY SF SF		



January 30, 2025

To: Whom it May Concern

FROM: Carli R. Dockstader

Engineer I (701) 572-8100

SUBJECT: Pre-Bid Meeting for Detention Pond 6 & East Airport Drainage Ditch

A pre-bid meeting was held on January 30, 2025, at 9:00 am CST at the City of Williston Public Works Building. The purpose of this meeting was to discuss the Detention Pond 6 and East Airport Drainage Ditch project and to give contractors an opportunity to go over the project design, specifications, schedule, and questions that may arise. The following is a synopsis of the meeting. The attendance sheet is attached for reference.

The following topics were discussed or questions asked during the meeting:

1. Project Summary:

The project involves the construction of Detention Pond 6 and approximately 500-feet of the East Airport Drainage Channel in Williston, North Dakota. This includes moving approximately 46,000 cy of earthwork and installing various sizes of storm drain infrastructure.

2. Bidding Information:

- a. Bid Closing / Opening Date: February 5, 2025 3:00 PM CT
- b. Bonds Due: One week after Notice of Award
- c. Notice of Award: February 12, 2025
- d. Notice to Proceed: By May 1, 2025. There will be some dialogue with the winning bidder as to when the exact NTP date begins.

Coordination with other contractors & staff will be required, as there are projects being completed adjacent to and concurrently with this project. City of Williston reserves the right to award concurrent contracts to other contractors without the permission of the winning bidder for this contract.

The Owner reserves the right to award any combination of bid items they determine is best for the project. The Contract will be awarded to the responsive bidder with the lowest combined bid items. The Owner reserves the right to reject any or all proposals or to waive any informality or

Pre-bid Meeting Minutes

technicality in any proposal. All bids shall hold firm for a period of sixty (60) days after the date of opening.

3. Construction Schedule:

The project has a construction schedule to be substantially completed by October 15, 2025. The final completion date is October 25, 2025.

4. Construction Notes:

- a. Machine grade control is required for earth-moving operations. The engineer will work with the successful bidder to deliver the appropriate files. The Contractor will be responsible to develop the machine models from the files provided.
- b. The City of Williston will provide a hydrant meter for construction water at no cost to the contractor.
- c. The contractor is responsible to identify and establish a staging site for their equipment. The Engineer must approve any staging areas before being built. The contractor will be required to restore any disturbed areas.
- d. Haul routes should be contained to existing established routes throughout the project site. The contractor may request additional routes, but the engineer must be consulted beforehand.
- Any disturbance outside the construction area is highly discouraged and will be subject to restoration to the satisfaction of the property owner at the cost of the contractor. Limits of disturbance have been established and will be communicated to the contractor.
- A traffic control plan must be submitted and approved by the engineer prior to implementation.
- All bidders are encouraged to review the special provisions and pay items before submitting a bid. Any questions will be answered in an addendum and circulated to all plan holders.
- h. Materials testing will be the responsibility of the contractor. Where the Project Manual notes differ from the Geotech Report, the most stringent requirement will apply.
- Alliance Consulting will be conducting the survey for site control and various staking needs. Re-staking costs will be assessed to the contractor for damaged or destroyed survey marking should it need to be replaced. Standard construction staking will be at cost to the owner. However, excessive restaking will be at cost to the contractor.
- It is the contractor's responsibility to coordinate with the utility companies. The utility companies were consulted during the planning of this project, and as long as contractors operate within the limits of disturbance, there shouldn't be any significant concerns.

5. Additional Discussion:

- The quantities reflected in Bid Item No. 11 Roadway Earthwork / Rework Material will be revised to include the 43,509 cubic yards of export for Pond 6A shown on C201 of the construction documents with additional information regarding the placement of the material in the forthcoming addendum. The export for Pond 6B will be bid as an alternate in the revised bid schedule.
- b. The contractor shall take the necessary steps to coordinate with the DOT project located on Highway 2. There will be detour routes expected on 9th Ave W.
- c. An overview map, including all projects being constructed by the City of Williston, will be published in an addendum.
- d. The contractor is responsible for the SWPPP, and an NOI will need to be filed.
- The contractor shall account for groundwater in the project area. Dewatering will need to take place to achieve the required compaction. There may be some adjustments to the required compaction for the east channel.
- The existing 42-inch RCP located on sheet C205 of the project construction drawings will be removed and re-installed in the proposed locations shown. The temporary 27-inch

- will be removed. The contractor will be required to field locate the 38-inch by 57-inch arch pipe and tie in the 96-inch manhole and adjust the additional arch pipe segment as needed.
- g. Addendum No. 1 sheet C300 stipulated the frequency and placement of control joints required in for the East Airport Drainage Ditch.
- h. Upon completion of the project, Alliance Consulting will asbuilt the project to compare to *Bit Item No. 11*.
- i. There was some discussion on the requested information on the qualifications statement of the contract documents. An addendum will be issued to reflect the changes made.

Attendees were asked if there were any other concerns or questions. Hearing none, the meeting concluded.

These minutes are a synopsis of the meeting. Any discrepancies must be submitted to the author within five days of receipt. Nothing contained herein is intended to change the meaning of the bid documents unless, and until, specifically amended by a formal, written addendum.

Please feel free to call with any questions or concerns.

Best regards,

Carli R. Dockstader Engineer I Alliance Consulting P) 701.572.8100

Alliance Consulting



A Planning and Engineering Firm

PRE-BID MEETING ATTENDANCE

Projects: 2nd Ave NW Roadway, Detention


Pond 6 and East Channel, 13th Ave W Phase 1A & Detention


Pond 8 Improvements Date: January 30, 2025


Project No: 25-001, 25-002, 25-003 **Time:** 9:00 AM


Location: Public Works - Williston, ND

Name	Company	Telephone	E-Mail
Caroline Heller	Knife River Construction	(701)713-3745	
Dwayne Fahnlander	Knife River Construction	(701)651-9294	
Ken Reinert	Spearfish Excavation Inc.	(605)641-2279	
David Juma	City of Williston	(701)577-6368	davidj@ci.williston.nd.us
Wayne Wiedrich	City of Williston	(701)577-6368	waynew@ci.williston.nd.us
Joseph Williams	Alliance Consulting	(701)572-8100	jhw@allianceconsulting.us
Virtual Attendees:			
Rob Bartz	BEK Consulting	(701)690-2937	robertb@bekweb.com
Samual Minnerath	CSI		samuel@centralspecialties.com
James Hammon	Alliance Consulting	(701)572-8100	jsh@allianceconsulting.us
Carli R. Dockstader	Alliance Consulting	(701)572-8100	carli@allianceconsulting.us
Craig Coats	Alliance Consulting	(701)572-8100	ccoats@allianceconsulting.us
Robert Hammon	Alliance Consulting	(701)572-8100	rlh@allianceconsulting.us
Dylan Dewey	Alliance Consulting	(701)572-8100	dylan@allianceconsulting.us

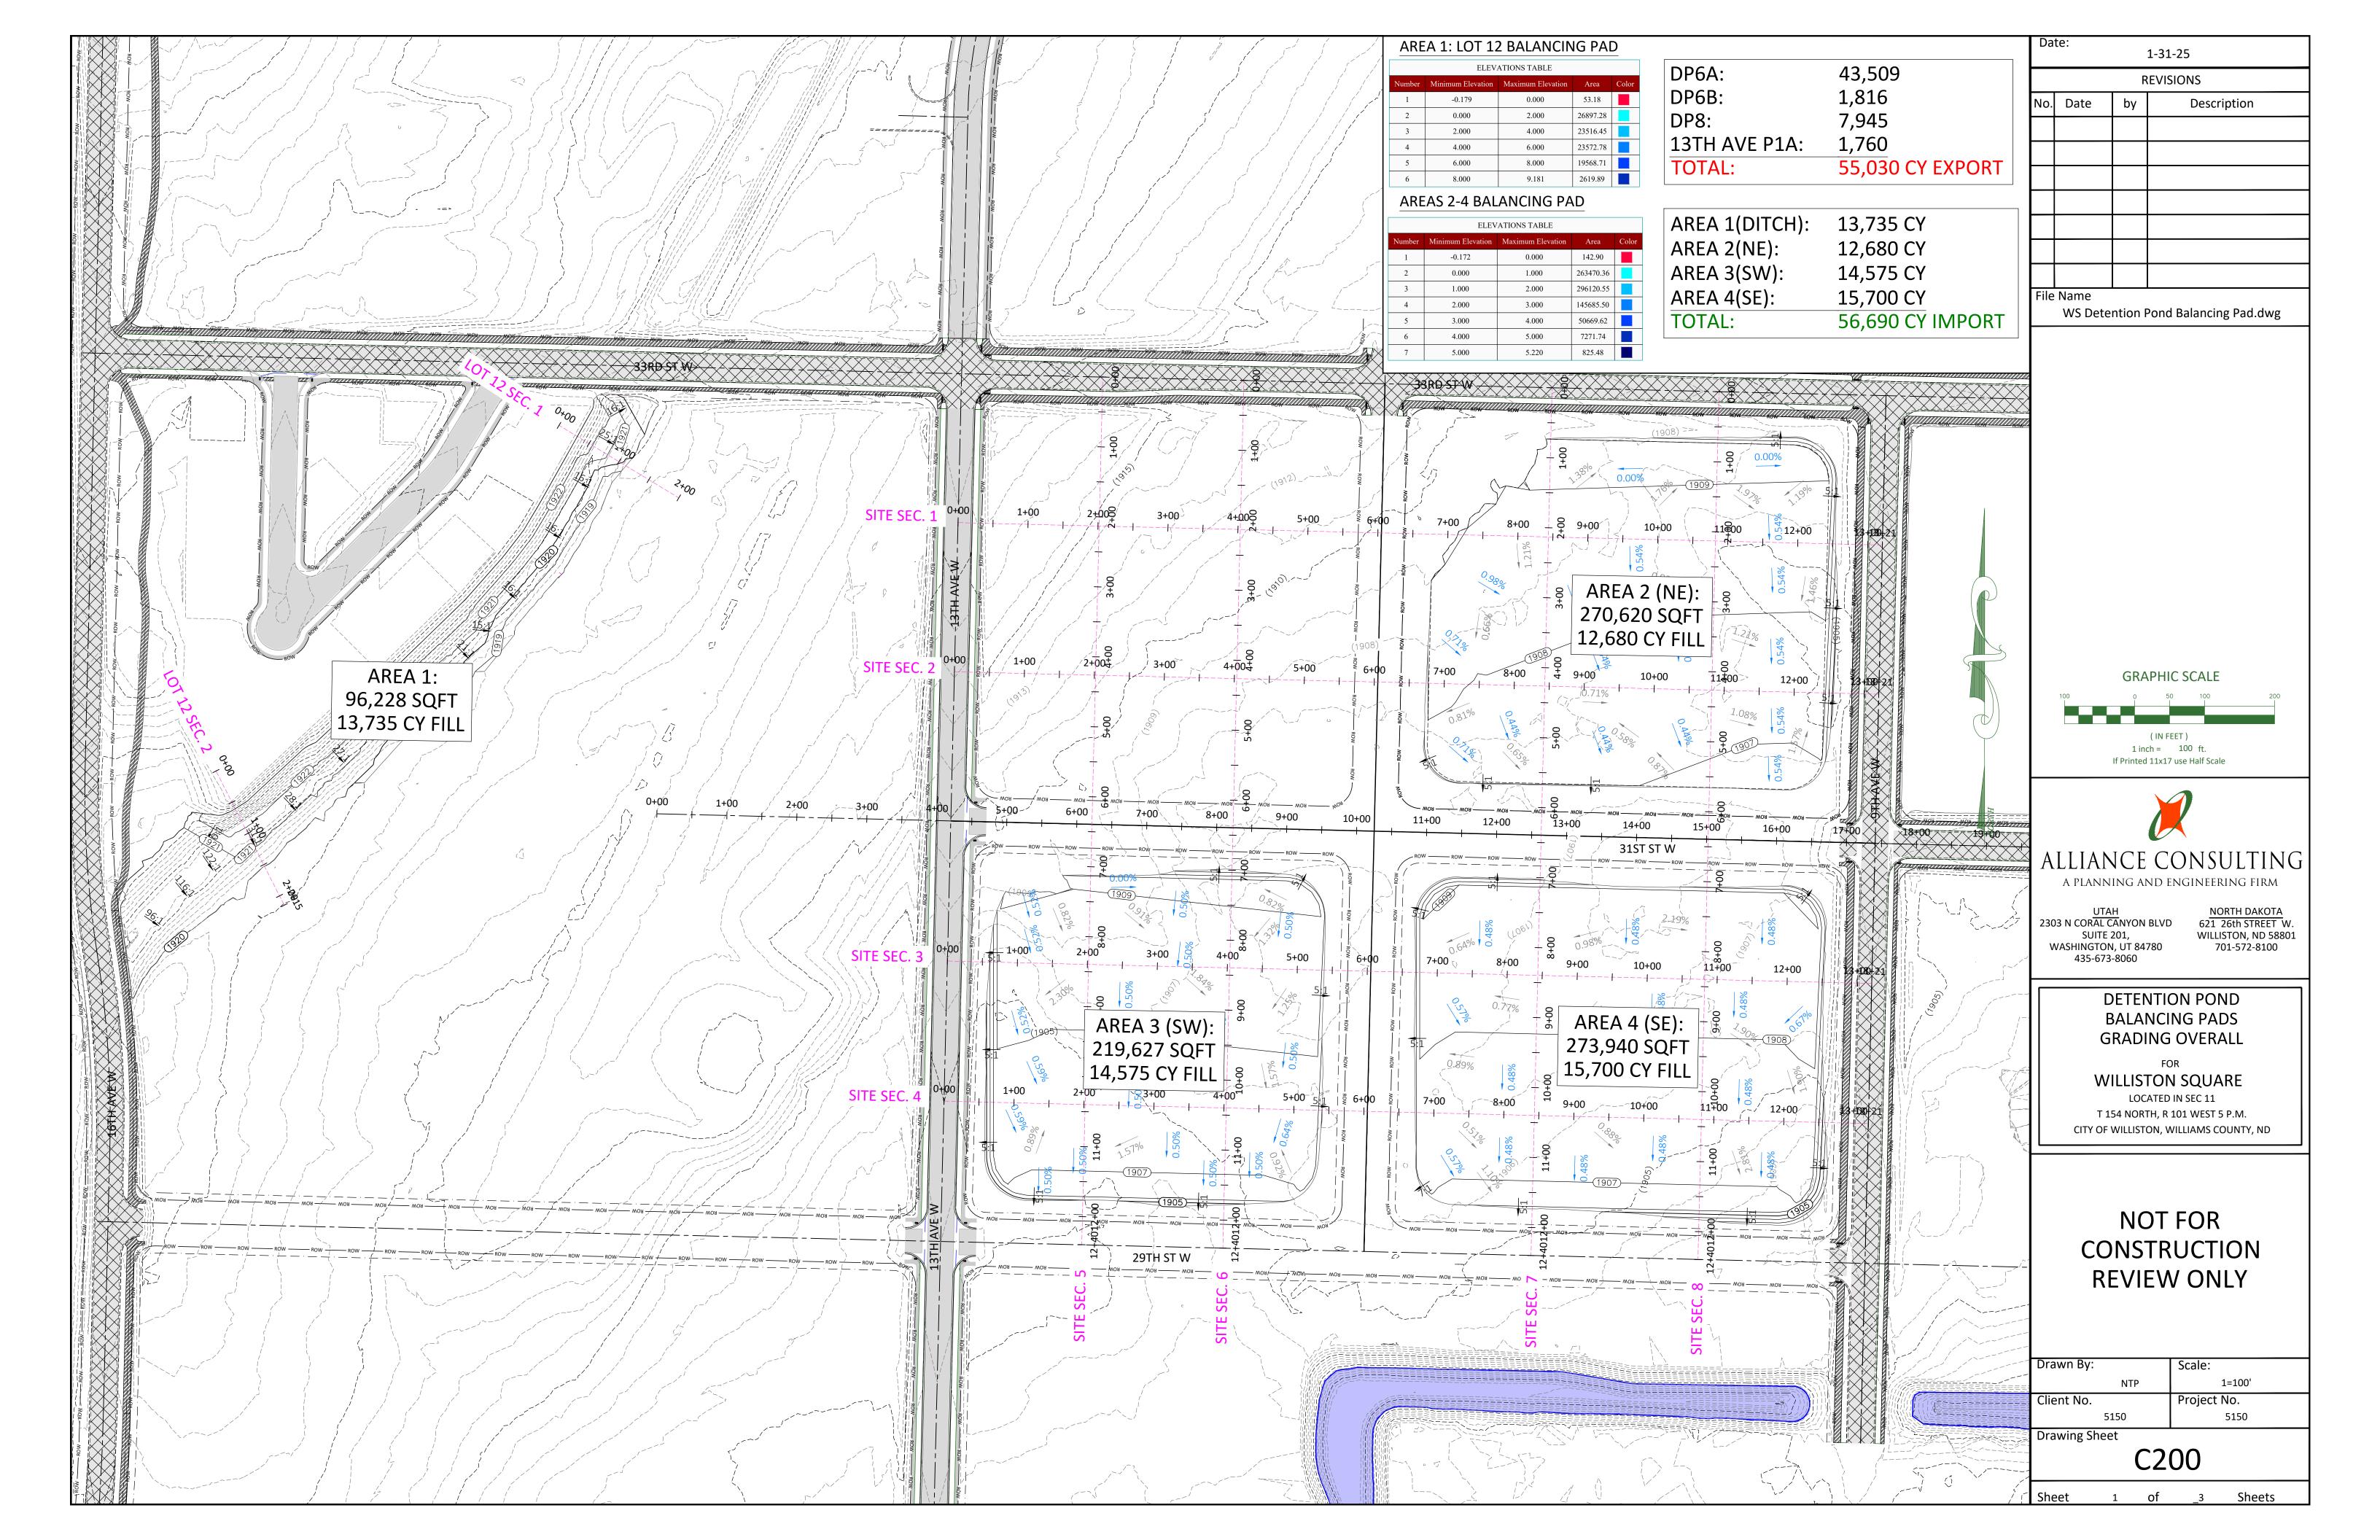

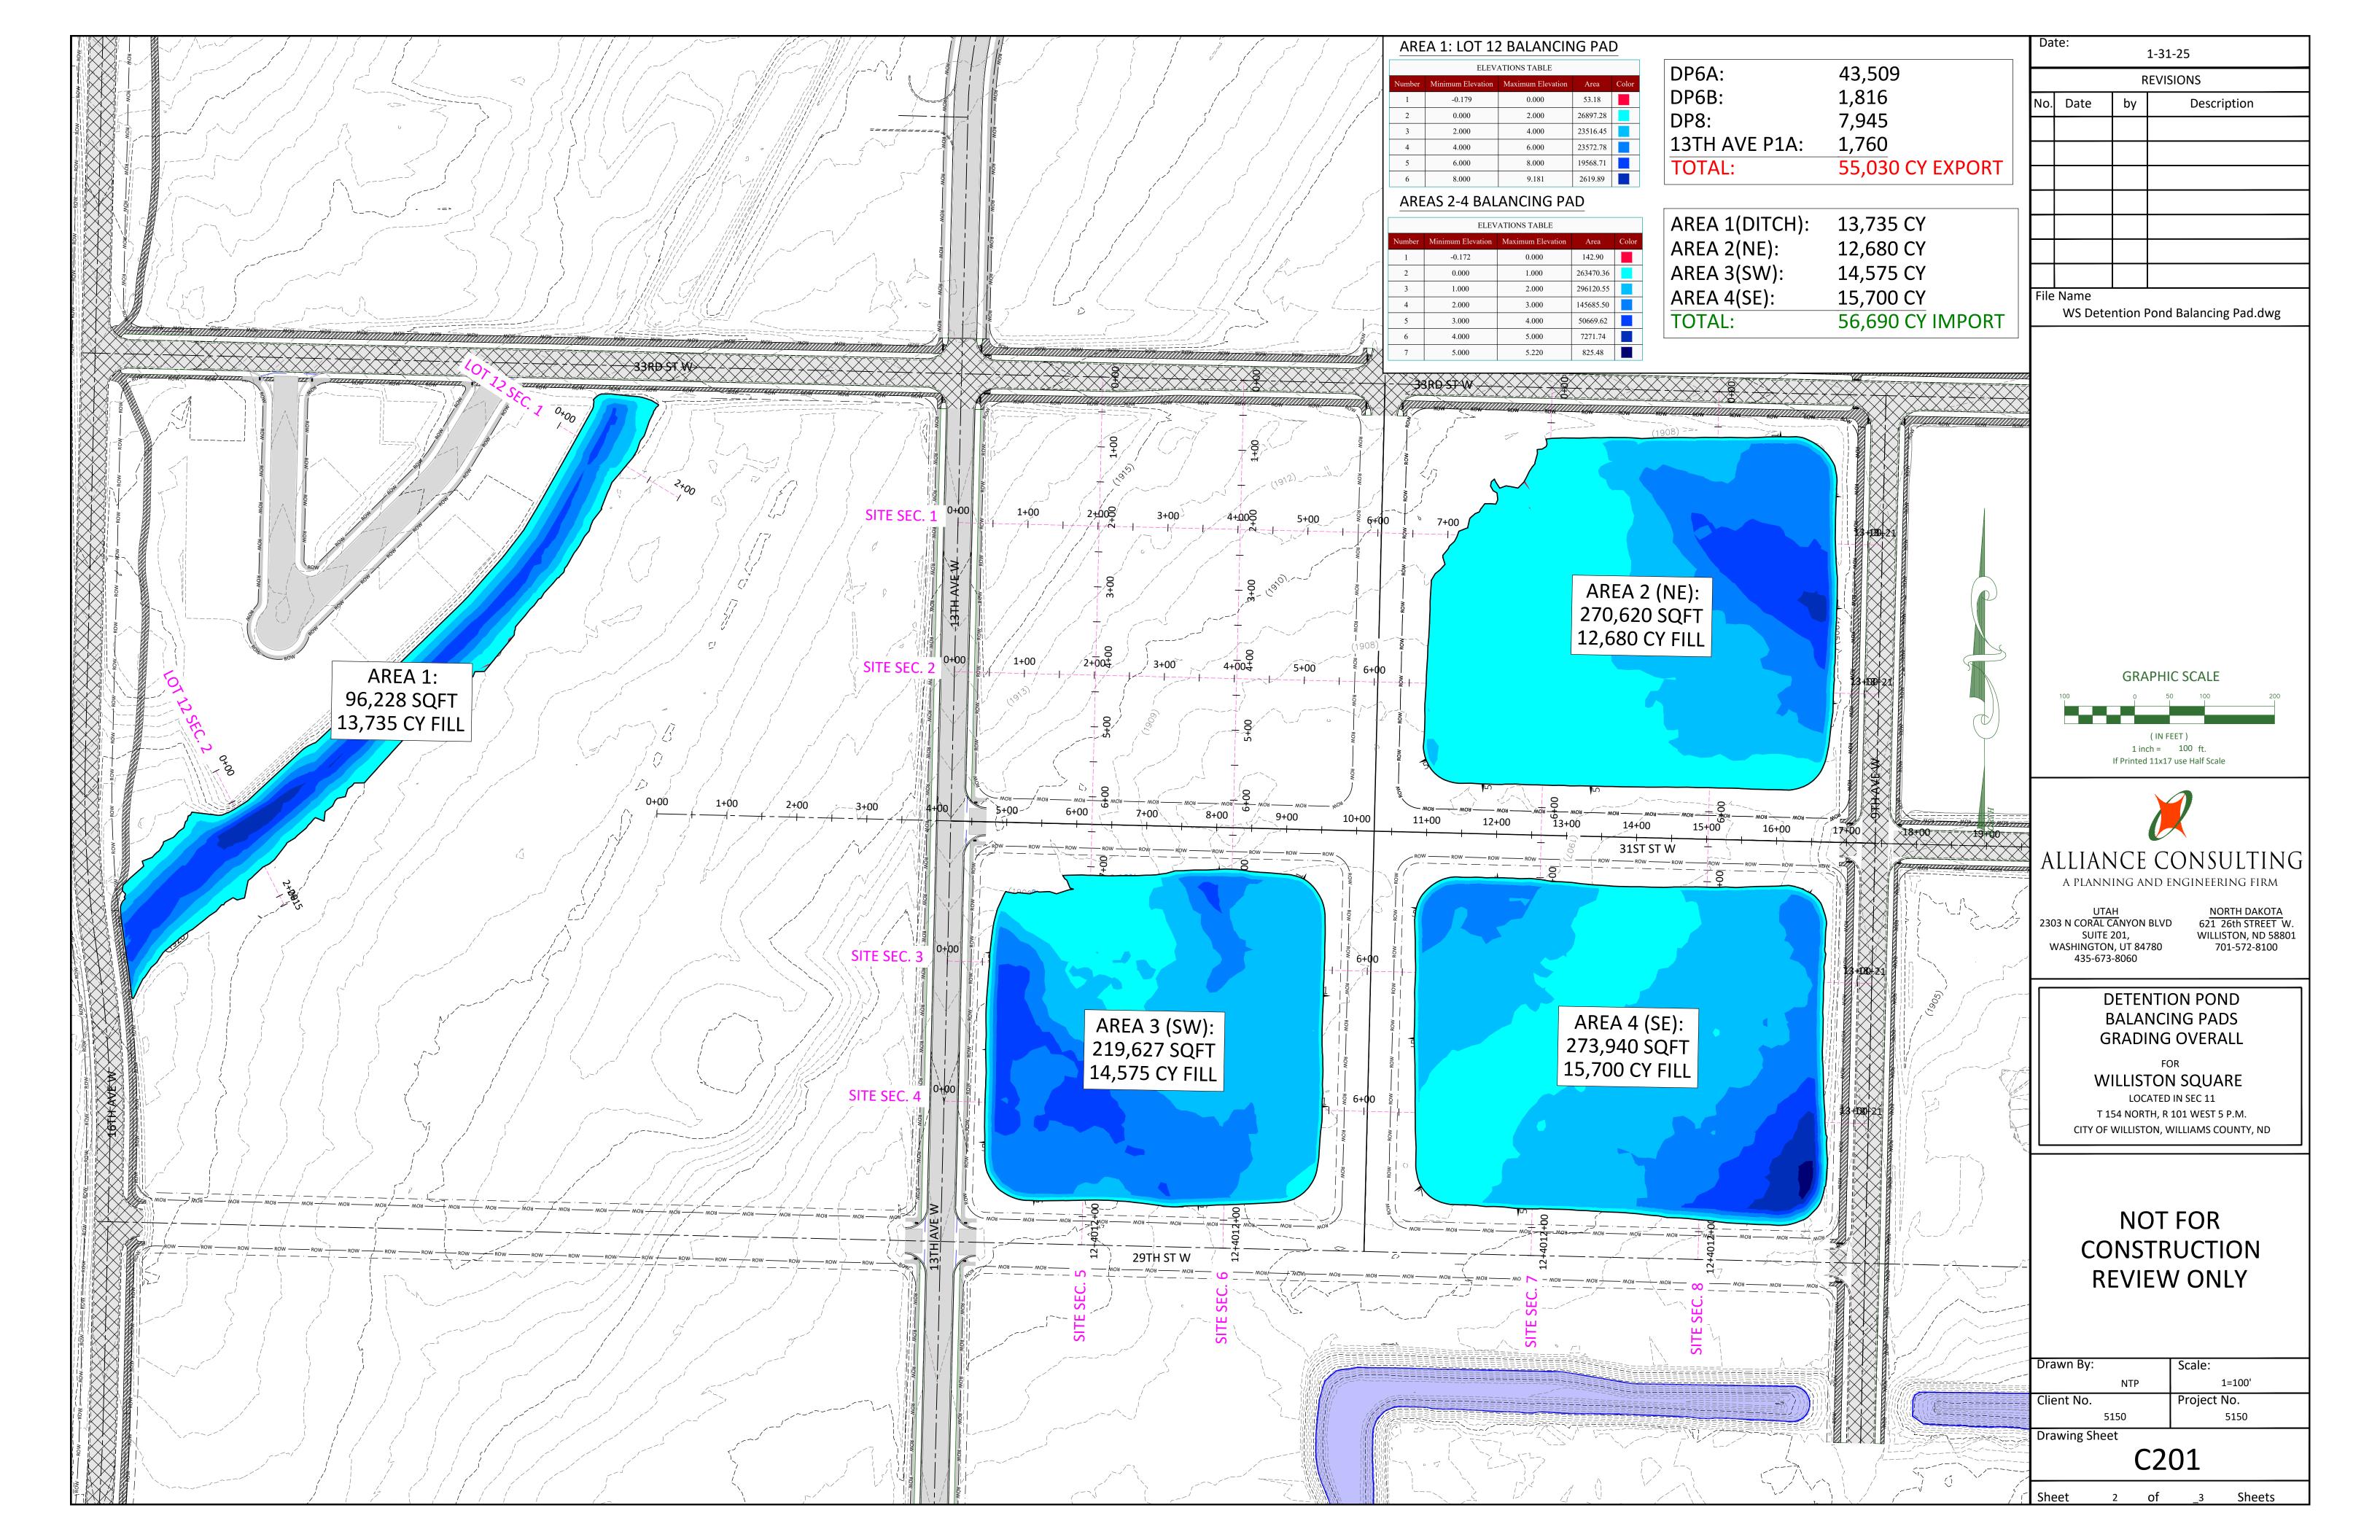

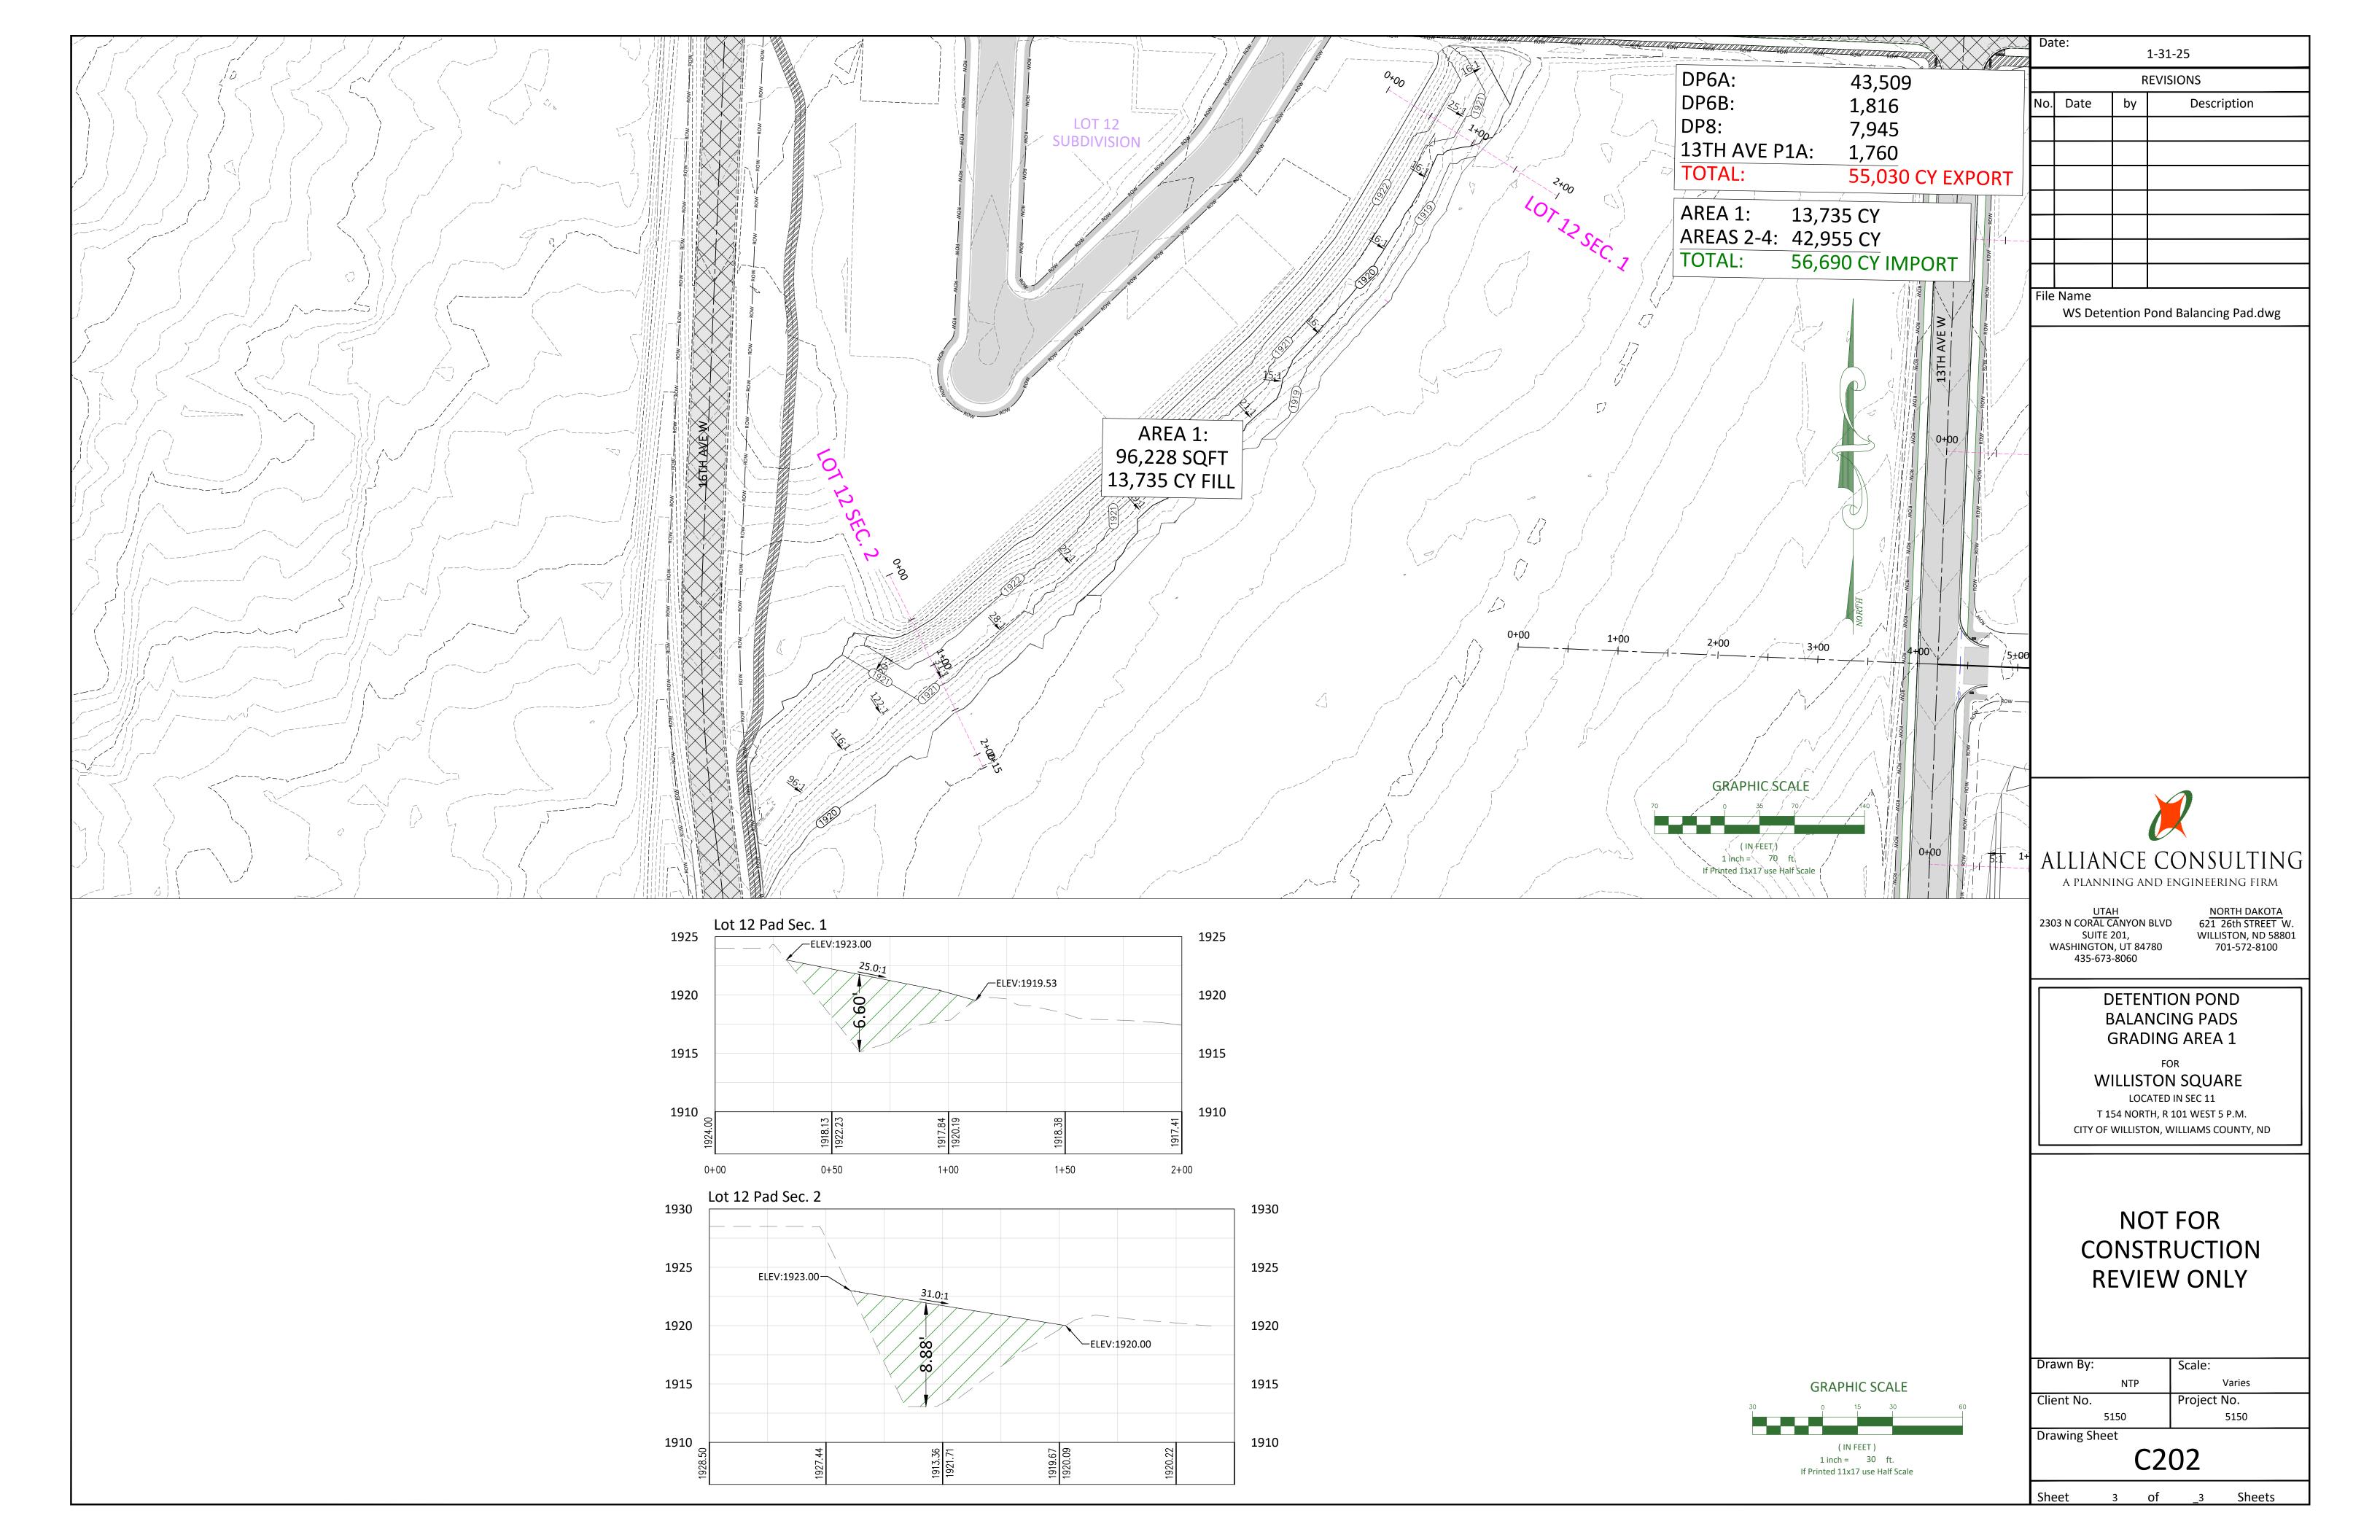

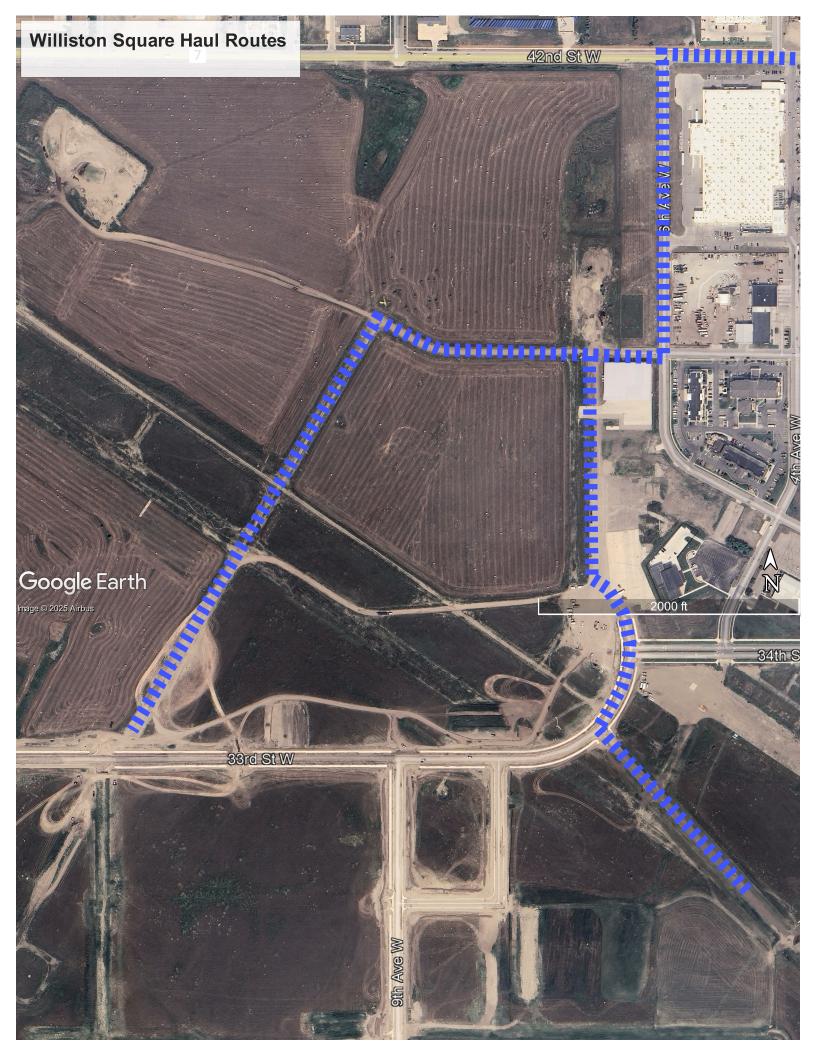


PROJECT LOCATION


2ND AVE NORTHWEST ROADWAY IMPROVEMENTS

FOR CITY OF WILLISTON LOCATED IN WILLISTON CITY, ND



PROJECT DRAWING INDEX			
SHEET NO.	DESCRIPTION		
C100	COVER SHEET		
C101	CONSTRUCTION NOTES		
C102	CONTROL MAP		
C103	ROADWAY SECTIONS		
C104	DEMOLITION SHEET		
C105	TOP SOIL		
C106	SWPPP		
C200	OVERALL		
C201	CUT/FILL 2ND AVE NW		
C202-C204	2ND AVE ROADWAY PLAN AND PROFILES		
C205	STORM DRAIN SECTIONS		
C300	SEWER AND WATER OVERALL		
C301-C302	2ND AVE SEWER AND WATER PLAN AND PROFILE		
C303	SEWER AND WATER CROSS SECTIONS		
C400	POWER OVERALL		
C401-C403	2ND AVE POWER		
C404	WIRING DIAGRAMS		
C500	PAVING AND STRIPING OVERALL		
C501-C503	2ND AVE PAVING AND STRIPING		
C600-C607	DETAILS		
L100	LANDSCAPING		
L200	IRRIGATION		

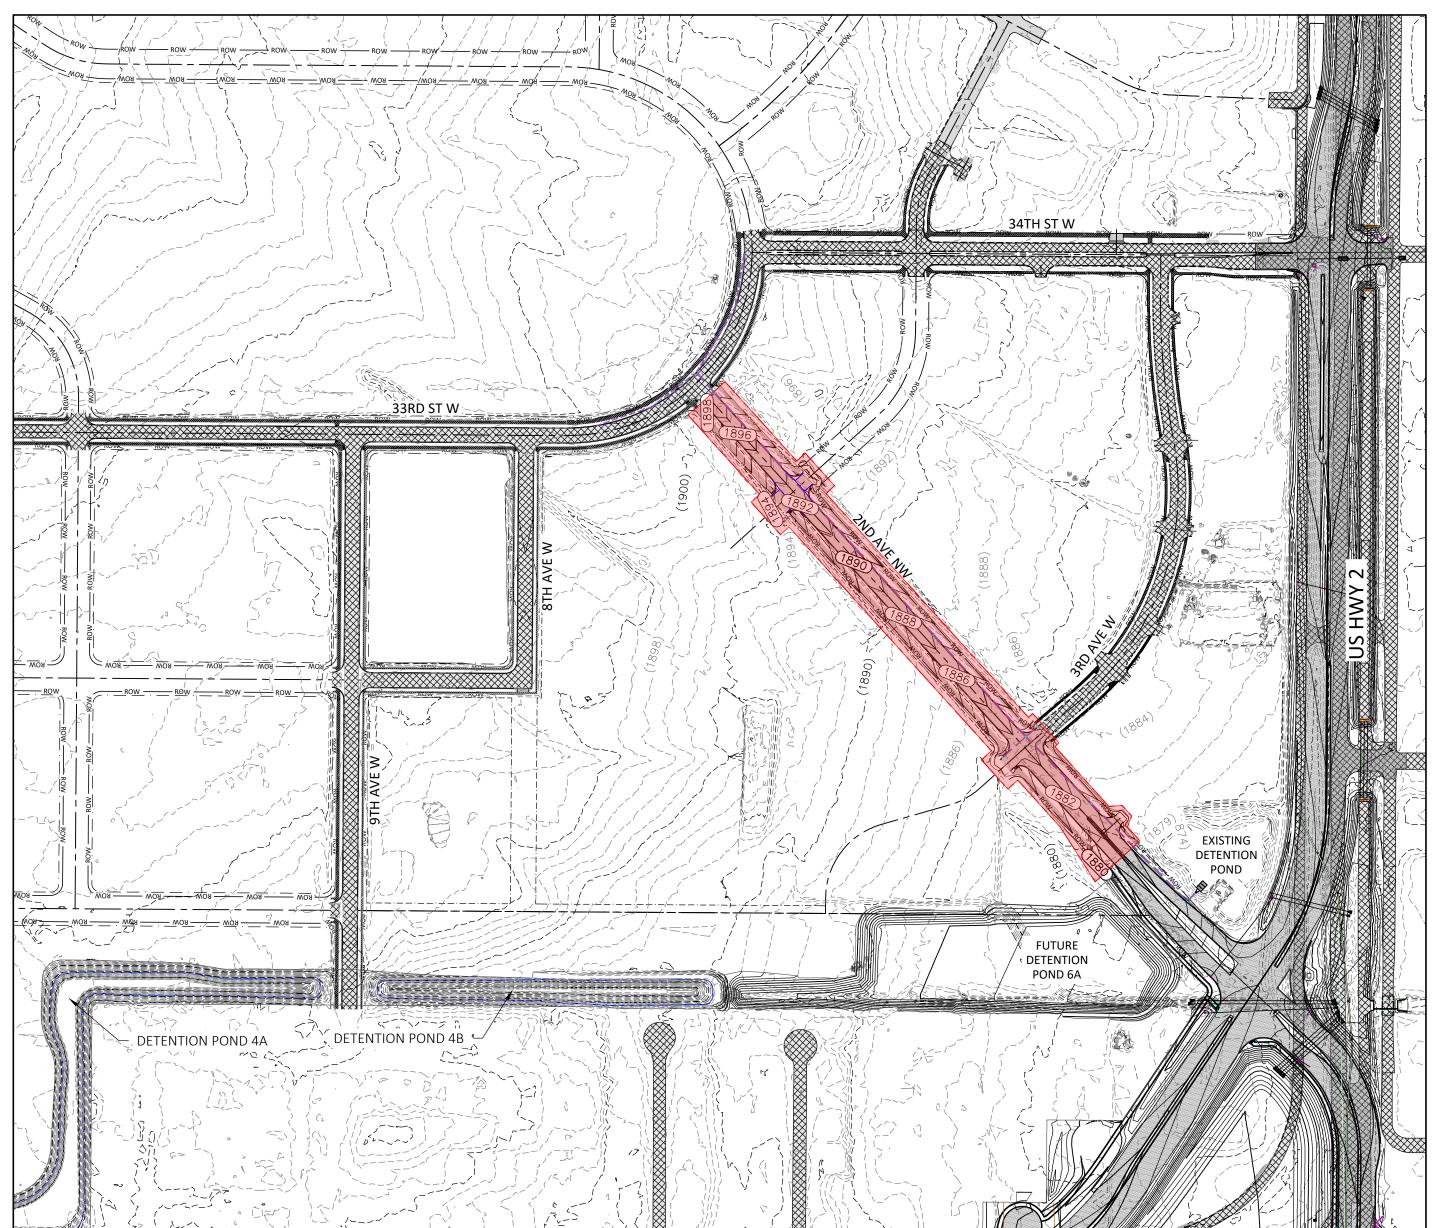

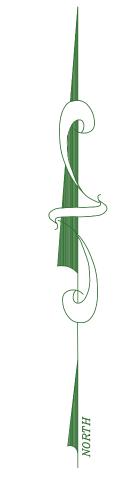




ENGINEER_ **ALLIANCE CONSULTING** 621 26th Street W WILLISTON, ND 58801 PHONE: (701) 572-8100 FAX: (701) 512-6110 CONTACT: JAMES HAMMON ENGINEER: DELOSS HAMMON



CITY CITY OF WILLISTON 1121 5th STREET EAST WILLISTON, ND 58801 PHONE: (701) 334-2223 CONTACT: DAVID JUMA



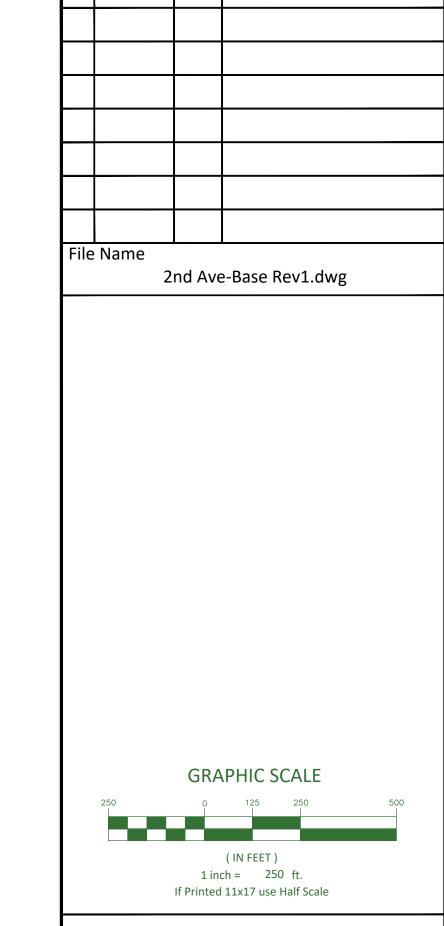

1-16-25

REVISIONS

Description



NORTH DAKOTA

621 26th STREET W.

WILLISTON, ND 58801

701-572-8100

2303 N CORAL CANYON BLVD SUITE 201, WASHINGTON, UT 84780 435-673-8060

> 2ND AVE NW **ROADWAY IMPROVEMENTS** COVER

> > CITY OF WILLISTON LOCATED IN SEC 12 T 154 NORTH, R 101 WEST 5 P.M.

CITY OF WILLISTON, WILLIAMS COUNTY, ND



Drawn By:			Scale:	
	NT	Р	:	1"=250'
Client No.			Project	No.
5150		5150		
Drawing She	eet			
C100				
Sheet	1	of	_36	Sheets

UTILITIES

MOUNTRAIL WILLIAMS ELECTRIC COOPERATIVE: WILLISTON HEADQUARTERS P.O BOX 1346 218 58th St W WILLISTON, ND 58802 PHONE: (701) 577-3765

MONTANA-DAKOTA UTILITIES CO. 220 2nd AVE.EAST PHONE: (701) 572-1600 EMER. (800) 638-3278

NORTHWEST COMMUNICATIONS COOPERATIVE (NCC) 111 RAILROAD AVENUE PO BOX 38

CABLE TV:

MIDCONTINENT COMMUNICATIONS 1102 9th AVE. W WILLISTON, ND 58802 PHONE: (701) 572-3709 CONTACT: AARON KIETZMANN aaron_kietzmann@mmi.net

TELECOMMUNICATIONS: NEMONT.

PHONE: (701) 572-4900 CONTACT: RYAN OLSON ryan.olson@nemont.coop

RAY, ND 58849 PHONE: 801-245-5884


PROJECT LOCATION **13TH AVE W ROADWAY**

WILLISTON SQUARE

13TH AVE WEST ROADWAY CONSTRUCTION FOR

CITY OF WILLISTON LOCATED IN WILLISTON CITY, ND



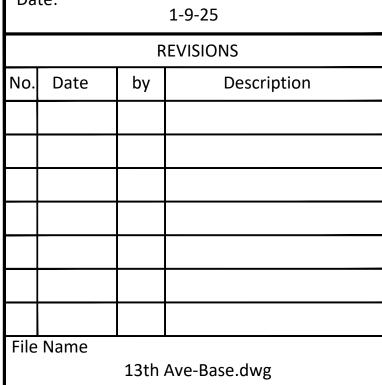

1 inch = 400 ft.



2303 N CORAL CANYON BLVD SUITE 201, WASHINGTON, UT 84780 435-673-8060

NORTH DAKOTA 621 26th STREET W. WILLISTON, ND 58801 701-572-8100

13TH AVE WEST **COVER SHEET**


CITY OF WILLISTON

LOCATED IN SEC 11 & 12 T 154 NORTH, R 101 WEST 5 P.M. CITY OF WILLISTON, WILLIAMS COUNTY, ND



Drawn By:	Scale:		
NTP	1"=400'		
Client No.	Project No.		
5150	5150		
Drawing Sheet			
C100			

PROJECT DRAWING INDEX SHEET NO. DESCRIPTION **COVER SHEET CONSTRUCTION NOTES CONTROL MAP ROADWAY SECTIONS** C103-C104 **TOP SOIL** C105-C106 C107-C108 **OVERALL GRADING** C203-C210 13TH AVE W ROADWAY PLAN AND PROFILES 36TH ST W ROADWAY PLAN AND PROFILE 37TH & 38TH ST W ROADWAY PLAN AND PROFILES 39TH ST W ROADWAY PLAN AND PROFILE C214-C215 STORM DRAIN SECTIONS C300-C301 13TH AVE SEWER AND WATER PLAN AND PROFILE 36TH ST W SEWER & WATER PLAN AND PROFILE 37TH ST W & 38TH ST W SEWER & WATER SECTIONS 39TH ST W SEWER & WATER SECTION C313-C315 SEWER SUPPLEMENTAL SHEETS POWER OVERALL C400-C401 POWER C402-C407 WIRING DIAGRAMS PAVING AND STRIPING OVERALL C500-C501 C502-C503 ROAD SECTIONS 13TH AVE WEST PAVING AND STRIPING C504-C514

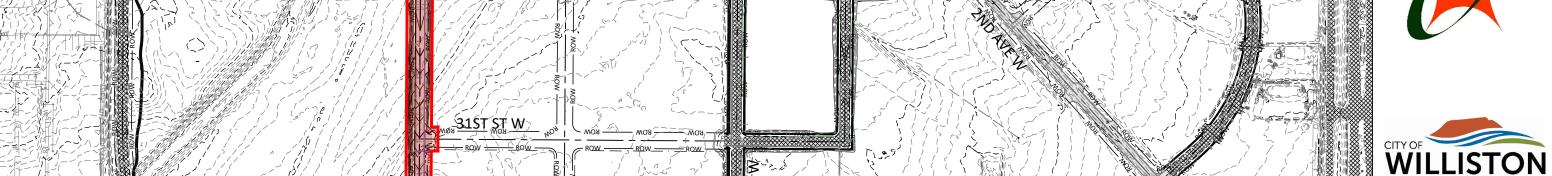

<u> Alianniiseautus</u>

UTILITIES

C600-C607

L1.1-L1.5

L2.0-L2.7

MOUNTRAIL WILLIAMS ELECTRIC COOPERATIVE: WILLISTON HEADQUARTERS P.O BOX 1346 218 58th St W WILLISTON, ND 58802 PHONE: (701) 577-3765

DETAILS

LANDSCAPING

IRRIGATION

MONTANA-DAKOTA UTILITIES CO. 220 2nd AVE.EAST PHONE: (701) 572-1600

EMER. (800) 638-3278 NORTHWEST COMMUNICATIONS COOPERATIVE (NCC) 111 RAILROAD AVENUE PO BOX 38 RAY, ND 58849

PHONE: 801-245-5884

CABLE TV:

MIDCONTINENT COMMUNICATIONS 1102 9th AVE. W WILLISTON, ND 58802 PHONE: (701) 572-3709 CONTACT: AARON KIETZMANN aaron kietzmann@mmi.net

TELECOMMUNICATIONS: NEMONT.

PHONE: (701) 572-4900 CONTACT: RYAN OLSON ryan.olson@nemont.coop

ENGINEER-

621 26th Street W

WILLISTON, ND 58801

PHONE: (701) 572-8100

FAX: (701) 512-6110

CITY OF WILLISTON 1121 5th STREET EAST WILLISTON, ND 58801

PHONE: (701) 334-2223 CONTACT: DAVID JUMA


CONTACT: JAMES HAMMON ENGINEER: DELOSS HAMMON

ALLIANCE CONSULTING

FUTURE

DETENTION

POND 6A

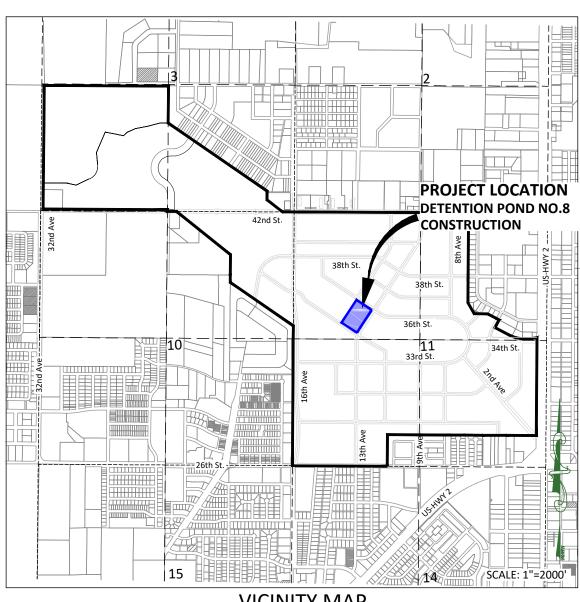

	PROJECT DRAWING INDEX				
NO.	SHEET	DESCRIPTION			
1	C100	COVER SHEET			
2	C101	CONSTRUCTION NOTES			
3	C102	CONTROL MAP			
4	C103	DUST AND SWPPP/EROSION CONTROL PLAN			
5	C104	TOPSOIL AND RE-SEEDING OVERALL			
6	C200	OVERALL GRADING			
7	C201	OVERALL VOLUME CUT/FILL			
8	C202	DETENTION POND NO. 8 GRADING PLAN AND PROFILE			
9	C203	DETENTION POND NO. 8 GRADING PLAN AND PROFILE			
10	C204	DETENTION POND NO. 8 STORM DRAIN PLAN AND PROFILE			
11	C300	DETAILS			
12	C301	DETAILS			


DETENTION POND NO.8 CONSTRUCTION


FOR


CITY OF WILLISTON LOCATED IN WILLISTON CITY, ND





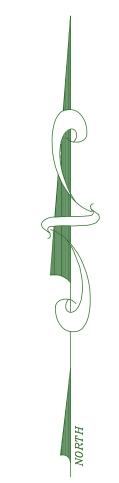

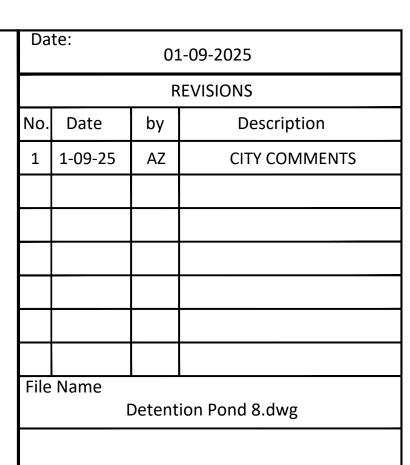

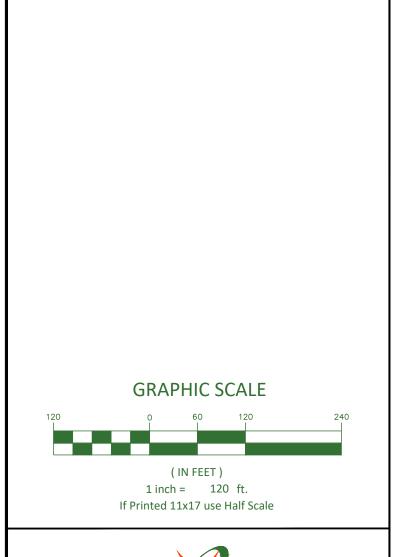



DETENTION POND NO.8

COVER SHEET

CITY OF WILLISTON

LOCATED IN SEC 11 & 12

T 154 NORTH, R 101 WEST 5 P.M.

CITY OF WILLISTON, WILLIAMS COUNTY, ND

2303 N CORAL CANYON BLVD SUITE 201, WASHINGTON, UT 84780

435-673-8060

NORTH DAKOTA 621 26th STREET W. WILLISTON, ND 58801 701-572-8100




ENGINEER_ ALLIANCE CONSULTING 621 26th Street W WILLISTON, ND 58801 PHONE: (701) 572-8100 FAX: (701) 512-6110 CONTACT: JAMES HAMMON ENGINEER: DELOSS HAMMON



CITY OF WILLISTON 1121 5th STREET EAST WILLISTON, ND 58801 PHONE: (701) 334-2223 CONTACT: DAVID JUMA



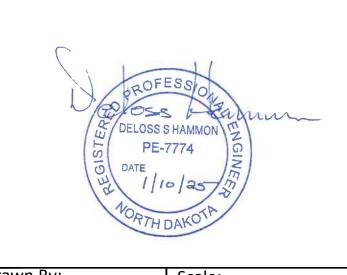

Drawn By: Scale: 1"=120' Client No. Project No. 5149 5149

Drawing Sheet C100

of _12 Sheets

UTILITIES — MOUNTRAIL WILLIAMS ELECTRIC COOPERATIVE: WILLISTON HEADQUARTERS P.O BOX 1346 218 58th St W WILLISTON, ND 58802

PHONE: (701) 577-3765

MONTANA-DAKOTA UTILITIES CO. 220 2nd AVE.EAST PHONE: (701) 572-1600

EMER. (800) 638-3278 NORTHWEST COMMUNICATIONS COOPERATIVE (NCC) 111 RAILROAD AVENUE PO BOX 38 RAY, ND 58849

PHONE: 801-245-5884

CABLE TV:

MIDCONTINENT COMMUNICATIONS 1102 9th AVE. W WILLISTON, ND 58802 PHONE: (701) 572-3709 CONTACT: AARON KIETZMANN aaron_kietzmann@mmi.net

TELECOMMUNICATIONS: NEMONT.

PHONE: (701) 572-4900 CONTACT: RYAN OLSON ryan.olson@nemont.coop