


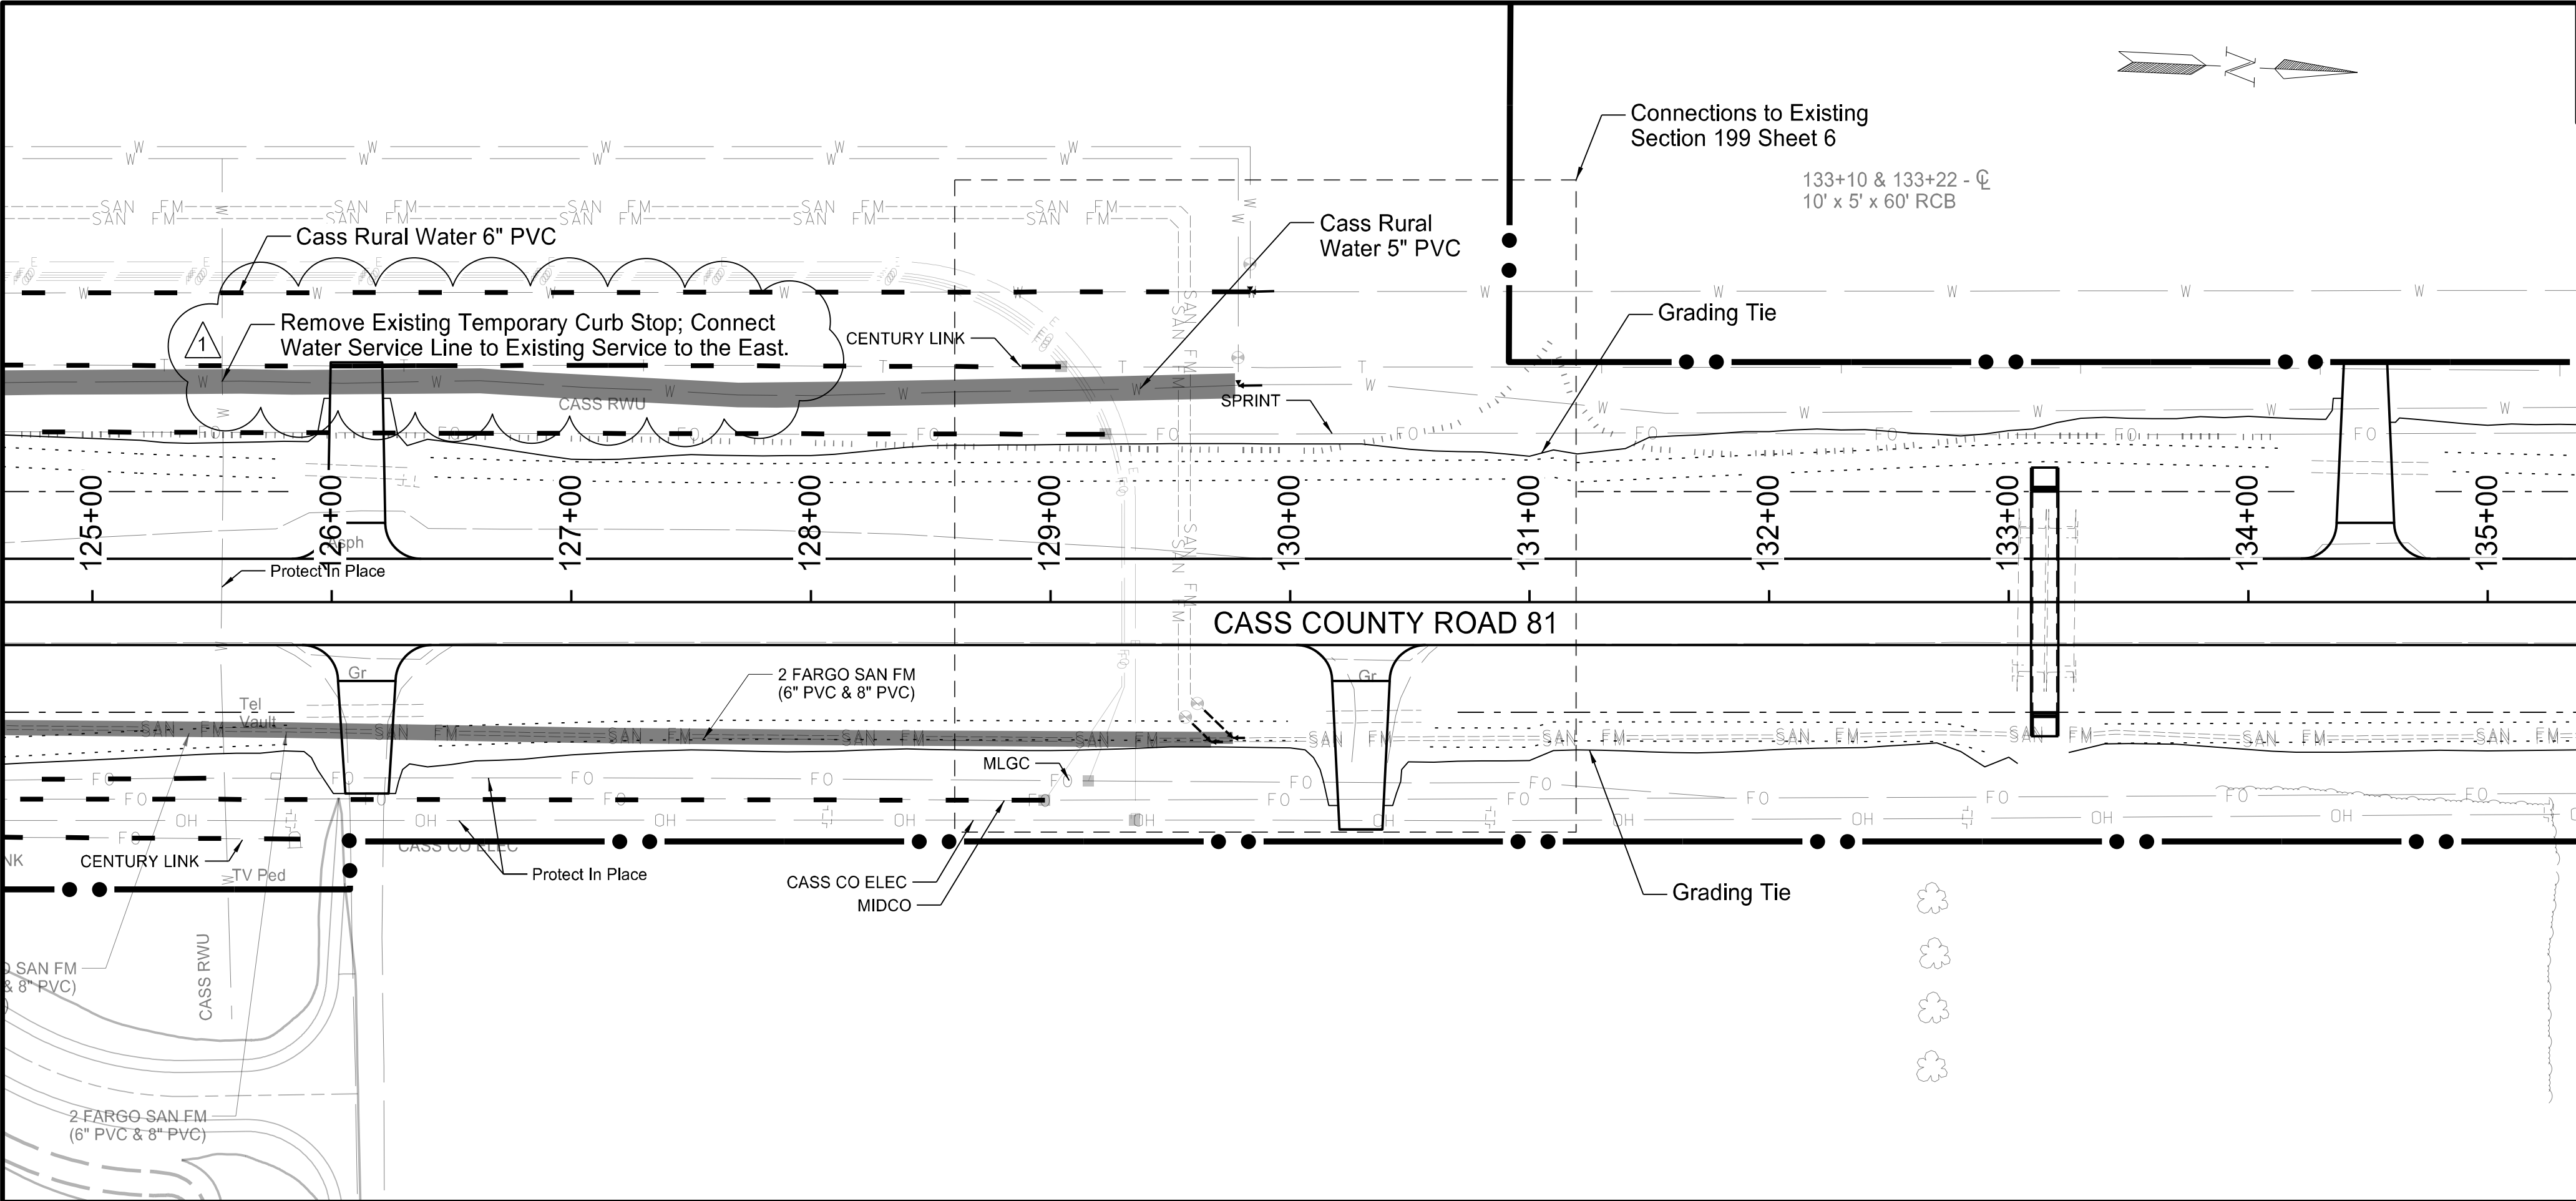

- Legend**
- Proposed Ditch Bottom Location
  - Proposed Inslope Grade Break at Clear Zone
  - Remove Existing Utility
  - Abandon Existing Utility
  - Work Limits

- Notes:
- Contractor shall coordinate each removal with Utility Owner. See Section 6 notes for utility contact information.
  - Cass County Electric Cooperative will remove their own overhead electric lines and power poles.

| Utility Description                          | Start Location | End Location | Remove/Abandon   |
|----------------------------------------------|----------------|--------------|------------------|
| Cass Rural Water 6" PVC                      | 105+01 Lt      | 106+76 Lt    | Abandon          |
|                                              | 106+76 Lt      | 119+95 Lt    | Remove           |
|                                              | 119+95 Lt      | 129+83 Lt    | Abandon          |
| Cass Rural Water 5" PVC                      | 105+07 Lt      | 129+78 Lt    | Remove           |
| Cass Rural Water 1" Service                  | 113+01 Lt      | 113+05 Rt    | Remove           |
| City of Fargo Sanitary Force Main 8" PVC     | 105+11 Rt      | 129+76 Rt    | Remove           |
| City of Fargo Sanitary Force Main 6" PVC     | 105+18 Rt      | 129+67 Rt    | Remove           |
| Cass County Electric Cooperative OH Electric | 105+45 Rt      | 123+06 Rt    | Remove By Others |
| CenturyLink FO Comm                          | 105+55 Lt      | 105+91 Lt    | Abandon          |
|                                              | 105+91 Lt      | 117+83 Lt    | Remove           |
|                                              | 117+83 Lt      | 129+04 Lt    | Abandon          |
| CenturyLink FO Comm                          | 106+31 Rt      | 116+83 Rt    | Remove           |
|                                              | 116+83 Rt      | 125+87 Rt    | Abandon          |

| Utility Description | Start Location | End Location | Remove/Abandon |
|---------------------|----------------|--------------|----------------|
| Midco FO Comm       | 105+80 Rt      | 106+31 Rt    | Abandon        |
|                     | 106+31 Rt      | 116+88 Rt    | Remove         |
|                     | 116+88 Rt      | 128+98 Rt    | Abandon        |
| MLGC FO Comm (2)    | 105+61 Rt      | 106+31 Rt    | Abandon        |
|                     | 106+31 Rt      | 116+92 Rt    | Remove         |
|                     | 116+92 Rt      | 125+48 Rt    | Abandon        |
| Sprint FO Comm      | 105+94 Rt      | 106+31 Rt    | Abandon        |
|                     | 106+31 Rt      | 116+95 Rt    | Remove         |
|                     | 116+95 Rt      | 123+89 Rt    | Abandon        |
|                     | 123+89 Rt      | 123+99 Lt    | Abandon        |
|                     | 123+99 Lt      | 129+23 Lt    | Abandon        |

Utility Connection, Removal & Abandonment Plan

County Road 81  
Reach SE-3 Roadway Improvements  
Sta 125+00 to Sta 135+00

